

10/516694

CORRECTED VERSION

(19) World Intellectual Property  
Organization  
International Bureau





(43) International Publication Date  
24 December 2003 (24.12.2003)

PCT

(10) International Publication Number  
WO 2003/105638 A1

- (51) International Patent Classification<sup>7</sup>: A47G 33/08 (81) Designated States (*national*): CZ, SK, UA, US.
- (21) International Application Number: PCT/PL2002/000081 (84) Designated States (*regional*): European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR).
- (22) International Filing Date: 31 October 2002 (31.10.2002)
- (25) Filing Language: English Published:  
— with international search report  
— with amended claims and statement
- (26) Publication Language: English
- (30) Priority Data: P.354439 12 June 2002 (12.06.2002) PL (48) Date of publication of this corrected version: 15 July 2004
- (71) Applicant and (15) Information about Correction:  
see PCT Gazette No. 29/2004 of 15 July 2004, Section II
- (72) Inventor: MOSTOWSKI, Robert [PL/PL]; ul. Ulan & nacuteska 18, PL-42-200 Czestochowa (PL).
- (74) Agent: BARCZYK, Boguslaw; ul. Fertnera 8 m.30, PL-42-209 Czestochowa (PL).
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: A THIN-WALLED, BLOWN GLASS ORNAMENT THAT OPENS

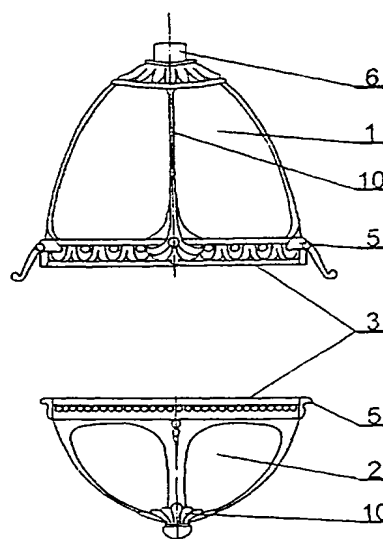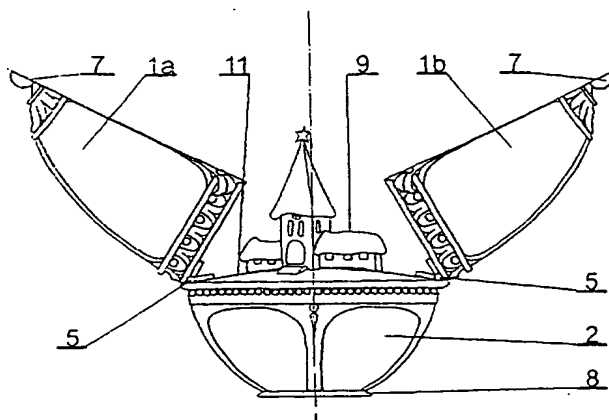

(57) Abstract: The invention concerns a thin-walled, blown glass ornament that may be repeatedly opened and closed. It is comprised of a spherical, spatial body consisting of at least two modules, top (1) and bottom (2) jointly connected with each other by means of an articulating hinge (5) or elastic band and at least one lock (4) situated on the rim of each module. The top module (1) comprises at least one spatial body and the bottom module (2) may feature a flat bottom (8). At least one additional miniature ornamental object (9) is situated inside the ornament that opens. Both modules may also be connected by means of locks (4).



WO 2003/105638 A1